



linea m hp indoor




RGB | RGBW







TECHNICAL DATASHEET

linea m hp indoor


RGB | RGBW

Technical Data


Dimensions	75 mm x 71 mm [W x H] 2.95 in x 2.80 in [W x H]
Fixture Typ	 RGB  RGBW
Color Temperatures W-Channel	2200 K, 2700 K, 3000 K, 4000 K * Project-specific LED-colors for RGBW/RGB available.
Beam Angles	8°, 10°, 23°, 43°, 52° 8° x 31°, 10° x 42°, 12° x 60°, 14° x 100°, 30° x 60°, 20° x 60° (Tilt in C0-plane: 10°), 20° x 60° (Tilt in C0-plane: -10°)
Luminous Flux	882 lm RGB -> 554 lm/ft
Light Source	12 LED(s)
Color Rendering Index	R _a >= 80
Antiglare	optional: <ul style="list-style-type: none">▪ Hex louver (internal)▪ Linear louver (internal)
LED-Binning	
MacAdam Ellipses Binning	3

Input Voltage	Power supply: internal 100 - 240, 277 VAC (50 - 60 Hz) 127 - 431 VDC
Power Consumption	Max. 21 W RGB -> 14 W/ft
Power Factor Correction	> 0,97 -> 115 VAC @ max. Output > 0,95 -> 230 VAC @ max. Output > 0,92 -> 277 VAC @ max. Output
Protection Class	I
Inrush	55 A
Storage Temperatur	-40 °C / +80 °C -40 °F / +176 °F
Operating Temperature	-40 °C / +40 °C -40 °F / +104 °F
Start-up Temperature	-25 °C / +40 °C -13 °F / +104 °F
Lumen Maintenance [L70]	65'000 h @ 25 °C (77 °F) 40'000 h @ 40 °C (104 °F)
LED-Class	Class 2 LED-Product
Housing	Aluminium
Housing Color(s)	  Aluminium anodized (Standard) Black anodized
Lens	Tempered safety glass, extra white
Weight	311 mm / 12.25 in: 1,25 kg (2.76 lbs) 617 mm / 24.30 in: 2,5 kg (5.51 lbs) 922 mm / 36.30 in: 3,75 kg (8.27 lbs) 1228 mm / 48.35 in: 7 kg (15.43 lbs)
Ingress Protection	IP20
Environment	 indoor
Impact Protection	IK07
Certification	  

Beam Angles

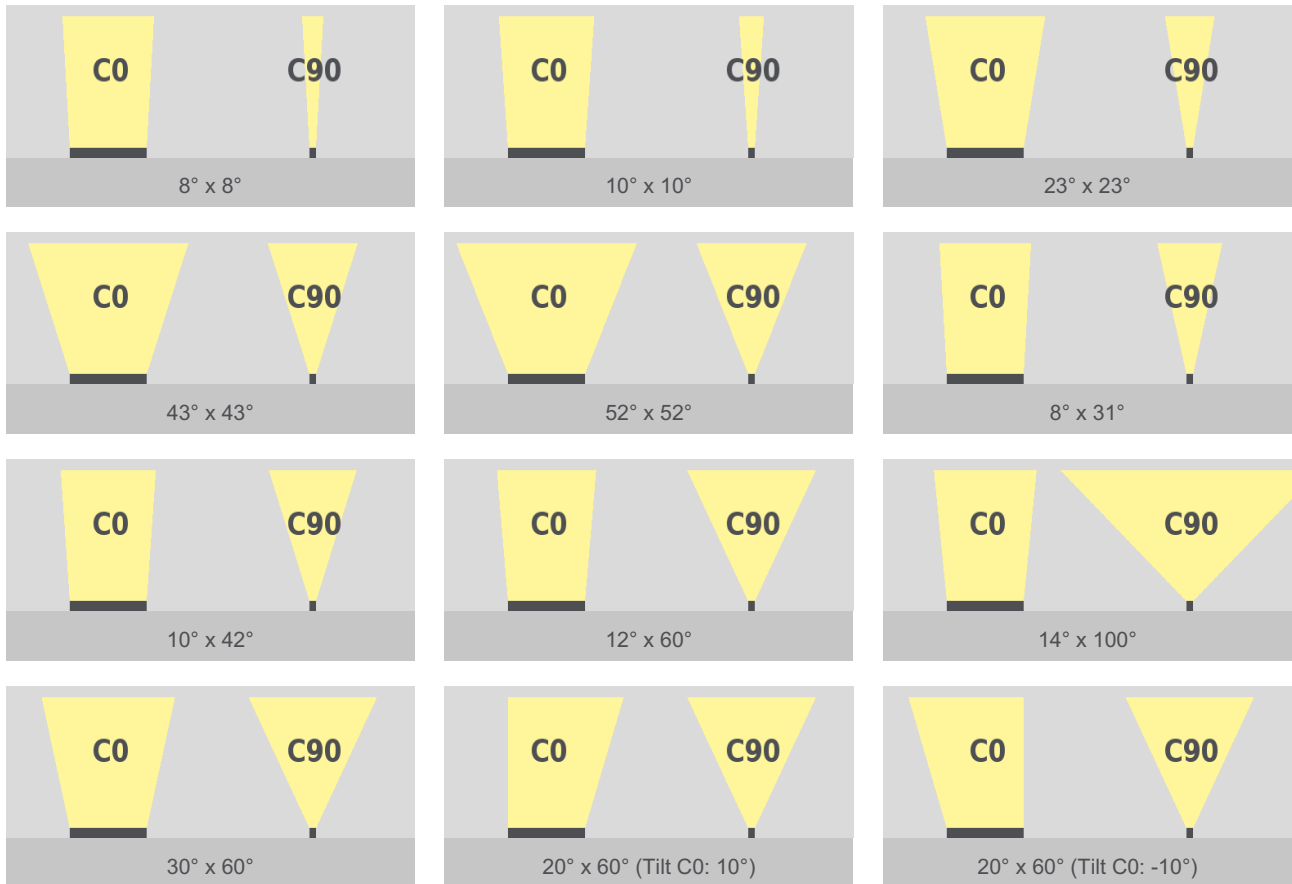

Engineering Drawing

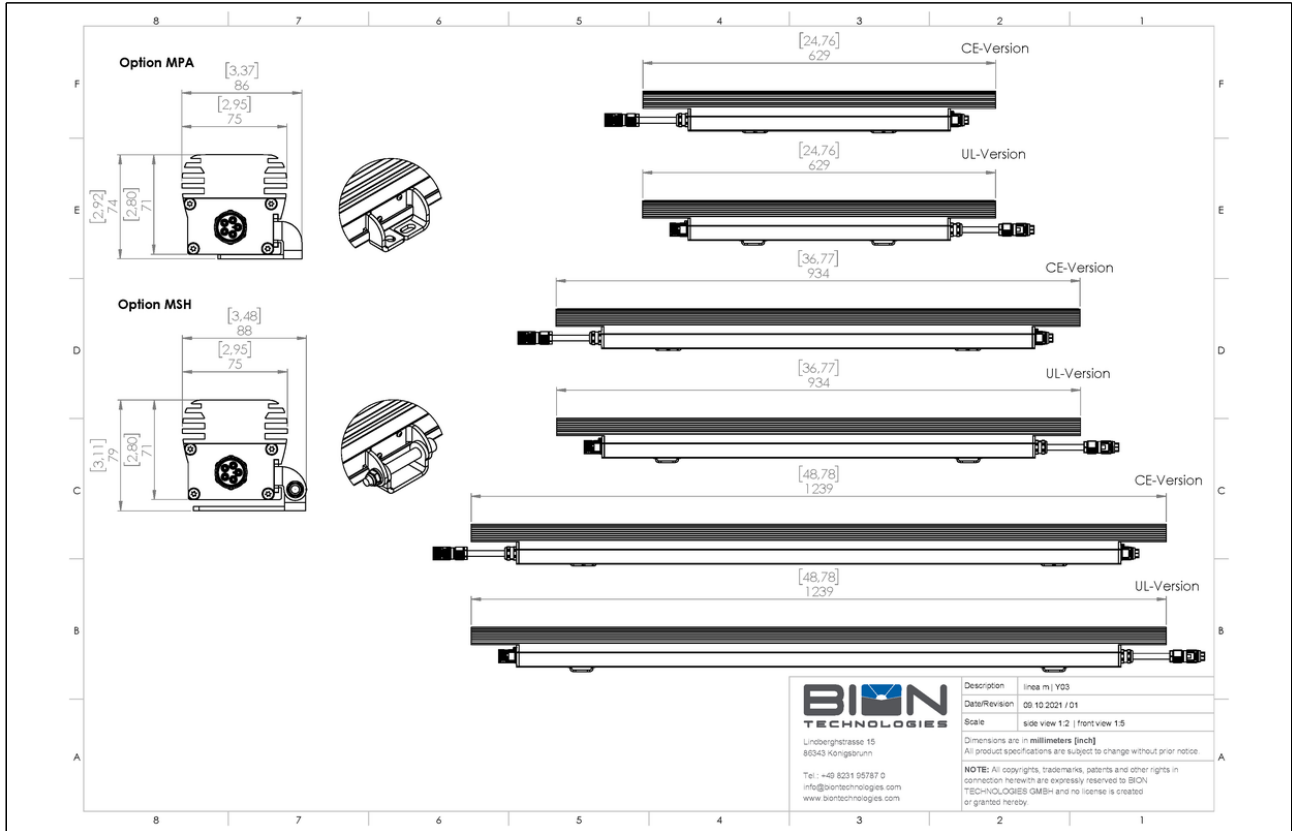

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your needs and write its corresponding code on the appropriate line to form the product code.

LIN-M-HP-IN- _____ - _____ - _____ - _____ - _____ - _____ - Y03

TYP - LUMINOUS COLOR	DIMMING	BEAM ANGLE	HOUSING COLOR	LEADERCABLE LENGTH	GLARE PROTECTION	MOUNTING OPTION																																																																						
<table style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2" style="text-align: left; padding: 2px;">TYP - LUMINOUS COLOR</th></tr> <tr><td style="padding: 2px;">RGS</td><td style="padding: 2px;">RGB</td></tr> <tr><td style="padding: 2px;">RGBW22</td><td style="padding: 2px;">RGBW - 2200 K</td></tr> <tr><td style="padding: 2px;">RGBW27</td><td style="padding: 2px;">RGBW - 2700 K</td></tr> <tr><td style="padding: 2px;">RGBW30</td><td style="padding: 2px;">RGBW - 3000 K</td></tr> <tr><td style="padding: 2px;">RGBW40</td><td style="padding: 2px;">RGBW - 4000 K</td></tr> </table>	TYP - LUMINOUS COLOR		RGS	RGB	RGBW22	RGBW - 2200 K	RGBW27	RGBW - 2700 K	RGBW30	RGBW - 3000 K	RGBW40	RGBW - 4000 K	DIMMING	<table style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2" style="text-align: left; padding: 2px;">BEAM ANGLE</th></tr> <tr><td style="padding: 2px;">8X8</td><td style="padding: 2px;">8° x 8°</td></tr> <tr><td style="padding: 2px;">10X10</td><td style="padding: 2px;">10° x 10°</td></tr> <tr><td style="padding: 2px;">23X23</td><td style="padding: 2px;">23° x 23°</td></tr> <tr><td style="padding: 2px;">43X43</td><td style="padding: 2px;">43° x 43°</td></tr> <tr><td style="padding: 2px;">52X52</td><td style="padding: 2px;">52° x 52°</td></tr> <tr><td style="padding: 2px;">8X31</td><td style="padding: 2px;">8° x 31°</td></tr> <tr><td style="padding: 2px;">10X42</td><td style="padding: 2px;">10° x 42°</td></tr> <tr><td style="padding: 2px;">12X60</td><td style="padding: 2px;">12° x 60°</td></tr> <tr><td style="padding: 2px;">14X100</td><td style="padding: 2px;">14° x 100°</td></tr> <tr><td style="padding: 2px;">30X60</td><td style="padding: 2px;">30° x 60°</td></tr> <tr><td style="padding: 2px;">20X60Y10R</td><td style="padding: 2px;">20° x 60° (Tilt in C0-plane: 10°)</td></tr> <tr><td style="padding: 2px;">20X60Y10L</td><td style="padding: 2px;">20° x 60° (Tilt in C0-plane: -10°)</td></tr> </table>	BEAM ANGLE		8X8	8° x 8°	10X10	10° x 10°	23X23	23° x 23°	43X43	43° x 43°	52X52	52° x 52°	8X31	8° x 31°	10X42	10° x 42°	12X60	12° x 60°	14X100	14° x 100°	30X60	30° x 60°	20X60Y10R	20° x 60° (Tilt in C0-plane: 10°)	20X60Y10L	20° x 60° (Tilt in C0-plane: -10°)	<table style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2" style="text-align: left; padding: 2px;">HOUSING COLOR</th></tr> <tr><td style="padding: 2px;">AA</td><td style="padding: 2px;">Aluminium anodized (Standard)</td></tr> <tr><td style="padding: 2px;">BA</td><td style="padding: 2px;">Black anodized</td></tr> </table>	HOUSING COLOR		AA	Aluminium anodized (Standard)	BA	Black anodized	<table style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2" style="text-align: left; padding: 2px;">LEADERCABLE LENGTH</th></tr> <tr><td style="padding: 2px;">ETE</td><td style="padding: 2px;">End to end - wiring</td></tr> <tr><td style="padding: 2px;">003</td><td style="padding: 2px;">+ 30 cm (ca. 1 ft)</td></tr> <tr><td style="padding: 2px;">006</td><td style="padding: 2px;">+ 60 cm (ca. 2 ft)</td></tr> <tr><td style="padding: 2px;">009</td><td style="padding: 2px;">+ 90 cm (ca. 3 ft)</td></tr> <tr><td style="padding: 2px;">012</td><td style="padding: 2px;">+ 1,2 m (ca. 4 ft)</td></tr> </table>	LEADERCABLE LENGTH		ETE	End to end - wiring	003	+ 30 cm (ca. 1 ft)	006	+ 60 cm (ca. 2 ft)	009	+ 90 cm (ca. 3 ft)	012	+ 1,2 m (ca. 4 ft)	<table style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2" style="text-align: left; padding: 2px;">GLARE PROTECTION</th></tr> <tr><td style="padding: 2px;">OP</td><td style="padding: 2px;">No glare protection</td></tr> <tr><td style="padding: 2px;">HL</td><td style="padding: 2px;">Hex louver (internal)</td></tr> <tr><td style="padding: 2px;">LLO</td><td style="padding: 2px;">Linear louver (internal)</td></tr> </table>	GLARE PROTECTION		OP	No glare protection	HL	Hex louver (internal)	LLO	Linear louver (internal)	<table style="width: 100%; border-collapse: collapse;"> <tr><th colspan="2" style="text-align: left; padding: 2px;">MOUNTING OPTION</th></tr> <tr><td style="padding: 2px;">MPA</td><td style="padding: 2px;">Mounting Plate Basic</td></tr> <tr><td style="padding: 2px;">MSH</td><td style="padding: 2px;">Mounting Set Hinge</td></tr> </table>	MOUNTING OPTION		MPA	Mounting Plate Basic	MSH	Mounting Set Hinge
TYP - LUMINOUS COLOR																																																																												
RGS	RGB																																																																											
RGBW22	RGBW - 2200 K																																																																											
RGBW27	RGBW - 2700 K																																																																											
RGBW30	RGBW - 3000 K																																																																											
RGBW40	RGBW - 4000 K																																																																											
BEAM ANGLE																																																																												
8X8	8° x 8°																																																																											
10X10	10° x 10°																																																																											
23X23	23° x 23°																																																																											
43X43	43° x 43°																																																																											
52X52	52° x 52°																																																																											
8X31	8° x 31°																																																																											
10X42	10° x 42°																																																																											
12X60	12° x 60°																																																																											
14X100	14° x 100°																																																																											
30X60	30° x 60°																																																																											
20X60Y10R	20° x 60° (Tilt in C0-plane: 10°)																																																																											
20X60Y10L	20° x 60° (Tilt in C0-plane: -10°)																																																																											
HOUSING COLOR																																																																												
AA	Aluminium anodized (Standard)																																																																											
BA	Black anodized																																																																											
LEADERCABLE LENGTH																																																																												
ETE	End to end - wiring																																																																											
003	+ 30 cm (ca. 1 ft)																																																																											
006	+ 60 cm (ca. 2 ft)																																																																											
009	+ 90 cm (ca. 3 ft)																																																																											
012	+ 1,2 m (ca. 4 ft)																																																																											
GLARE PROTECTION																																																																												
OP	No glare protection																																																																											
HL	Hex louver (internal)																																																																											
LLO	Linear louver (internal)																																																																											
MOUNTING OPTION																																																																												
MPA	Mounting Plate Basic																																																																											
MSH	Mounting Set Hinge																																																																											

Sample Order Code: linea-m-hp-in-RGS-dim-DMX-4/1228-10x10-AA-Y01

* Project-specific options are available - Please contact our Sales Representative for further information.



Lindberghstrasse 15
86343 Koenigsbrunn
Tel: +49 (0)8231/95787-0
Fax: +49 (0)8231/95787-29
www.biontechnologies.com
info@biontechnologies.com

YouTube: <http://www.youtube.com/user/BIONTECHNOLOGIES>

© 2021, BION TECHNOLOGIS GMBH
All rights reserved / Subject to change / Specifications may change without notice