



VS 100-36




TECHNICAL DATASHEET

VS 100-36

Technical Data

Dimensions	350 mm x 320 mm x 90 mm [B x T x H] 13.78 in x 12.60 in x 3.55 in [B x T x H]
Control	0 - 10 V, DALI, DMX, POT, IOT
Input Voltage	Power supply: internal
Power Consumption	Max. 100 W
Power Factor Correction	> 0,94
Protection Class	I
Output Voltage	36 VDC
Inrush	COLD START 70A(t=1000 s measured at 50% I) at 230VAC; width peak Per NEMA 410 COLD START 35A(t=1000 s measured at 50% I) at 110VAC; width peak Per NEMA 410
Operating Temperature	-20 °C / +40 °C -4 °F / +104 °F
Housing	Steel-sheet, powdercoated
Housing Color(s)	White (RAL 9010)
Weight	5,7 kg (12.57 lbs)
Ingress Protection	IP20
Environment	 indoor
Certification	

Engineering Drawing

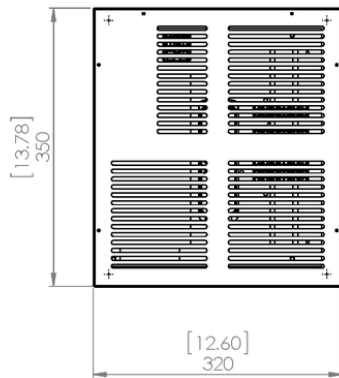

Dimensions are in millimeters [inch]
All product specifications are subject to change without prior notice.



Description	VS 600 tunableWhite	Scale	1:5
	Abmessungen / Dimensions	Pagesize	A4
Revision		Page	1/2



Lindberghstrasse 15
86343 Koenigsbrunn
Tel: +49 (0)8231/95787-0
Fax: +49 (0)8231/95787-29
www.biontechnologies.com
info@biontechnologies.com

YouTube: <http://www.youtube.com/user/BIONTECHNOLOGIES>

© 2023, BION TECHNOLOGIS GMBH
All rights reserved / Subject to change / Specifications may change without notice